
# Power Supply & Battery Charger ELK-P624



The ELK-P624 is a general purpose regulated power supply and battery charger. It is ideal for alarm, access control, and CCTV applications requiring up to 1 Amp continuous current. Automatic resetting "fuseless" overload protection means never having to return to a job site to replace a blown fuse.

On-board diagnostic LEDs indicate the presence of the AC charging and DC output voltages. The output voltage can be set with a mini-jumper.

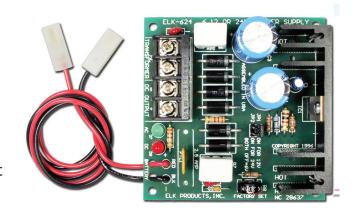

## **FEATURES**

- Selectable 6, 12, or 24 Volts DC Operation
- Automatic Resetting "fuseless" Overload Protection (PTC)
- Visual AC and DC Power Indicators
- Built-In Battery Charge Circuit
- Small, Compact Size
- Includes Double Sided Mounting Tape
- AC and DC Surge Suppression
- Lifetime Limited Warranty

# **SPECIFICATIONS**

- Standby Battery Capacity: 1.2 to 10 AH
- Size: 3" X 3" (76.2mm X 76.2mm)

### **6VDC Setting:**

- Current Rating: 1.2A
- Use 12V, 40VA Transformer

### 12VDC Setting:

- Current Rating: 1.0A
- Use 16.5V, 45VA Transformer

### 24VDC Setting:

- Current Rating: 800mA
- Use 24V, 40VA Transformer

